


MONOFLEXX SL VERT/NOIR

Flexible PVC hose reinforced with shock resistant rigid PVC spiral

| | |
|---------------------|--|
| Applications | agriculture, pond technology, waste water, irrigation, sewage treatment plants |
| Structure | PVC / soft PVC, green, transparent, plastic spiral / rigid PVC |
| Temperature | -5°C up to 60°C |
| Properties | good flexibility, high pressure resistance, high vacuum resistance, very smooth inside, good chemical resistance, good ozone- & UV-resistance, weather proof |

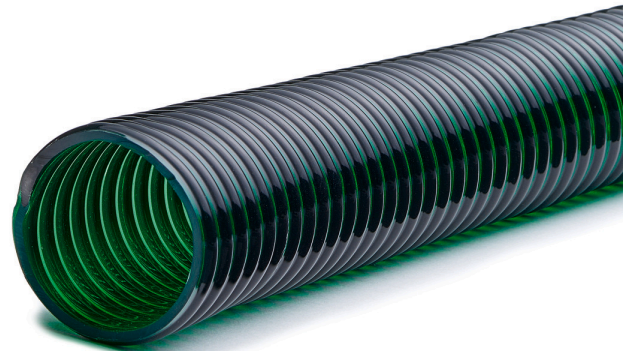

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Max. Operating Pressure (bar) | Vacuum Max. (bar) | Weight (kg/m) | Total Weight per Piece (kg) | Length (m) | Article Number |
|---------------------|---------------------|---------------------|---------------------|-------------------------------|-------------------|---------------|-----------------------------|------------|----------------|
| 20 | 25,40 | 2,70 | 104 | 7,00 | 0,69 | 0,21000 | 10,50 | 50 | NA90202065R |
| 25 | 29,80 | 2,50 | 130 | 7,00 | 0,69 | 0,30000 | 6,25 | 25 | NA90202565P |
| 25 | 29,80 | 2,90 | 130 | 7,00 | 0,69 | 0,30000 | 12,50 | 50 | NA90202565R |
| 32 | 38,00 | 3,00 | 155 | 7,00 | 0,69 | 0,39000 | 9,75 | 25 | NA90203265P |
| 32 | 38,00 | 3,00 | 155 | 7,00 | 0,69 | 0,39000 | 19,50 | 50 | NA90203265R |
| 38 | 45,00 | 3,50 | 180 | 6,00 | 0,69 | 0,47000 | 13,00 | 25 | NA90203865P |
| 38 | 45,00 | 3,50 | 180 | 6,00 | 0,69 | 0,47000 | 23,50 | 50 | NA90203865R |
| 50 | 57,60 | 4,20 | 240 | 5,00 | 0,69 | 0,76000 | 19,00 | 25 | NA90205065P |
| 50 | 57,60 | 4,20 | 240 | 5,00 | 0,69 | 0,76000 | 38,00 | 50 | NA90205065R |