


PU ECO C 0,4

Light weight and very flexible spiral hose made of polyurethane

Applications	extractions arms, filter systems, grass extraction, wood dust extraction, leaf extraction
Structure	TPU / Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
Temperature	-40°C up to 100°C, short term up to 125°C
Properties	very good flexibility, compressible, good abrasion resistance, hydrolysis & microbe resistant, free of halogen & softeners

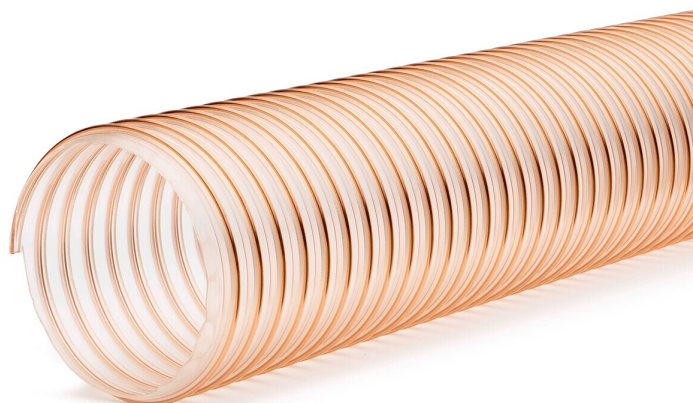

hydrolysis
resistant



microbe-
resistant



abrasion
resistant



air



dust



**made
in
Germany**

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
40	44,00	0,40	24	0,50	0,25	2,06	10	NU52104000K
51	55,00	0,40	31	0,45	0,20	2,57	10	NU52105100K
60	64,00	0,40	36	0,40	0,16	3,00	10	NU52106000K
80	84,00	0,40	48	0,28	0,10	3,94	10	NU52108000K
100	105,00	0,40	60	0,20	0,09	4,65	10	NU52110000K
120	125,00	0,40	72	0,20	0,08	5,55	10	NU52112000K
140	145,00	0,40	84	0,15	0,06	6,45	10	NU52114000K
150	155,00	0,40	90	0,10	0,06	6,90	10	NU52115000K
160	165,00	0,40	96	0,09	0,06	7,35	10	NU52116000K
180	185,00	0,40	108	0,09	0,06	8,25	10	NU52118000K
200	206,00	0,40	120	0,08	0,05	9,87	10	NU52120000K
250	256,00	0,40	150	0,05	0,04	12,26	10	NU52125000K