


VIDASPIR SL VERT

Flexible hose made of soft PVC, reinforced with an shock

Applications	agriculture, water drain, irrigation, sewage treatment plants, pump technology
Structure	PVC / soft PVC, green, opaque, plastic spiral / rigid PVC
Temperature	-5°C up to 60°C
Properties	good flexibility, high pressure resistance, high vacuum resistance, corrugated outside, very smooth inside, good chemical resistance, good ozone- & UV-resistance, hydrolysis & microbe resistant, weather proof

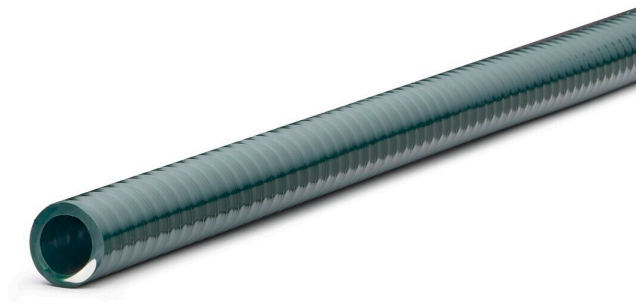

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,40	4,20	140	7,00	0,78	0,48000	24,00	50	NA52502500R
38	47,00	4,50	180	7,00	0,78	0,71000	35,60	50	NA52503800R
50	59,40	4,70	220	7,00	0,78	1,08000	48,25	50	NA52505000R
75	86,60	5,80	300	5,00	0,78	1,80000	85,00	50	NA52507500R