
Ocono


France

MONOFLEXX SL NOIR

Flexible PVC hose with shock-resistant rigid PVC spiral

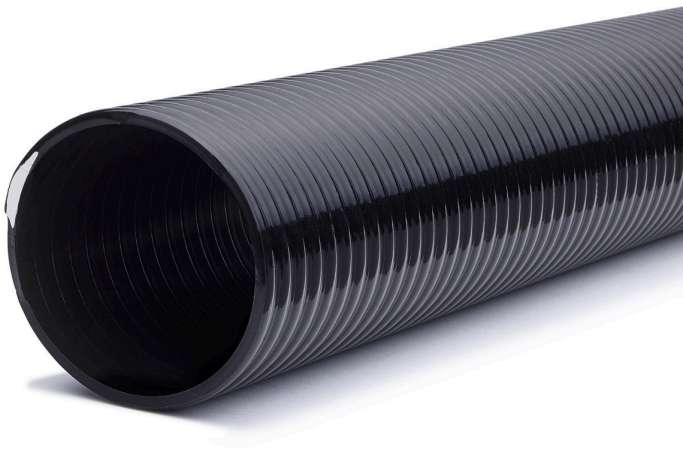

Applications	pond technology, pump technology, irrigation, agriculture, water drain
Structure	soft PVC, black, opaque, plastic spiral / rigid PVC
Temperature	-5°C up to 60°C
Properties	good flexibility, smooth inside, corrugated outside, , weather proof, phthalate-free





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	23,80	2,40	80	5,00	0,69	0,20000	10,00	50	NA90201950R
19	23,80	2,40	80	5,00	0,69	0,20000	5,00	25	NA90201950P
25	30,00	2,50	110	5,00	0,69	0,25000	6,25	25	NA90202550P
25	30,00	2,50	110	5,00	0,69	0,25000	12,50	50	NA90202550R
32	37,60	2,80	135	5,00	0,69	0,32000	0,32	25	NA90203250P
32	37,60	2,80	135	5,00	0,69	0,32000	16,00	50	NA90203250R
38	44,40	3,20	160	5,00	0,69	0,42000	0,42	25	NA90203850P
38	44,40	3,20	160	5,00	0,69	0,42000	21,00	50	NA90203850R
40	46,60	3,30	170	5,00	0,69	0,47000	11,75	25	NA90204050P
40	46,60	3,30	170	5,00	0,69	0,47000	23,50	50	NA90204050R
50	56,80	3,40	220	5,00	0,69	0,64000	32,00	50	NA90205050R
50	56,80	3,40	220	5,00	0,69	0,64000	16,00	25	NA90205050P

Ocono France SARL | 30 Chemin de Fortuneau | 26200 Montélimar | France | T +33 475 017575 | france@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.

Date: 25.11.2026