VIDASPIR SL VERT

Flexible hose made of soft PVC, reinforced with an shock

Applications agriculture, water drain, irrigation, sewage treatment plants, pump technology

Structure soft PVC, green, opaque, plastic spiral / rigid PVC

Temperature -5°C up to 60°C

Properties good flexibility, high pressure resistance, high vacuum resistance, corrugated outside, very smooth inside, good chemical resistance, good ozone- & UV-resistance, hydrolysis & microbe resistant, weather proof

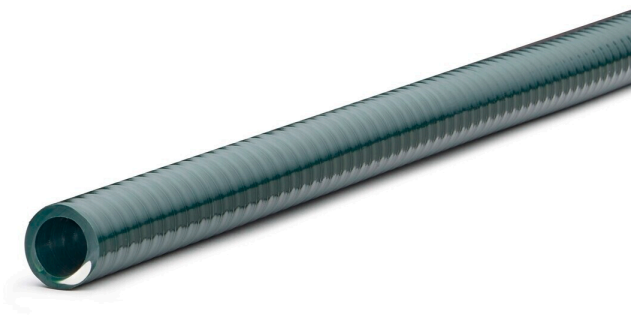





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,40	4,20	140	7,00	0,78	0,48000	24,00	50	NA52502500R
38	47,00	4,50	180	7,00	0,78	0,71000	35,60	50	NA52503800R
50	59,40	4,70	220	7,00	0,78	1,08000	48,25	50	NA52505000R
75	86,60	5,80	300	5,00	0,78	1,80000	85,00	50	NA52507500R

Ocono France SARL | 30 Chemin de Fortuneau | 26200 Montélimar | France | T +33 475 017575 | france@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 26.11.2026