PU IND C 0,4

Lightweight and highly flexible spiral hose made of polyester-polyurethane

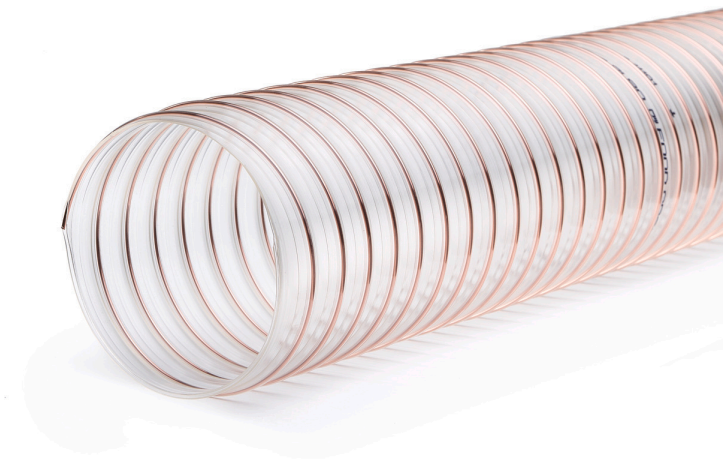

Applications extraction systems, dust extraction, wood dust extraction, textile fiber extraction, air extraction

Structure Polyester-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated

Temperature -40°C up to 100°C, short term up to 125°C

Properties very good flexibility, compressible, good abrasion resistance, good tensile strength ultimate elongation, good ozone- & UV-resistance





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
40	44,00	0,40	24	0,50	0,25	2,06	10	NU52104000K
51	55,00	0,40	31	0,45	0,20	2,57	10	NU52105100K
60	64,00	0,40	36	0,40	0,16	3,00	10	NU52106000K
80	84,00	0,40	48	0,28	0,10	3,94	10	NU52108000K
100	105,00	0,40	60	0,20	0,09	4,65	10	NU52110000K
120	125,00	0,40	72	0,20	0,08	5,55	10	NU52112000K
140	145,00	0,40	84	0,15	0,06	6,45	10	NU52114000K
150	155,00	0,40	90	0,10	0,06	6,90	10	NU52115000K
160	165,00	0,40	96	0,09	0,06	7,35	10	NU52116000K
180	185,00	0,40	108	0,09	0,06	8,25	10	NU52118000K
200	206,00	0,40	120	0,08	0,05	9,87	10	NU52120000K
250	256,00	0,40	150	0,05	0,04	12,26	10	NU52125000K

Ocono France SARL | 30 Chemin de Fortuneau | 26200 Montélimar | France | T +33 475 017575 | france@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026