


S 2 TOIVAC

Flexible and very heavy weight ducting made of PE

Applications	mobile toilets, sewage suction, waste disposal vehicles, waste water, sewage treatment plants
Structure	PE, yellow / saffron yellow (similar RAL 1017), opaque, plastic spiral / PE
Temperature	-40°C up to 60°C
Properties	can be driven over, crush-resistant, good tensile strength, very high vacuum resistance, very good chemical resistance, weather proof, good ozone- & UV-resistance, hydrolysis & microbe resistant, rot proof
Optional	- with tightly welded connection cuffs - cuffs also available individually

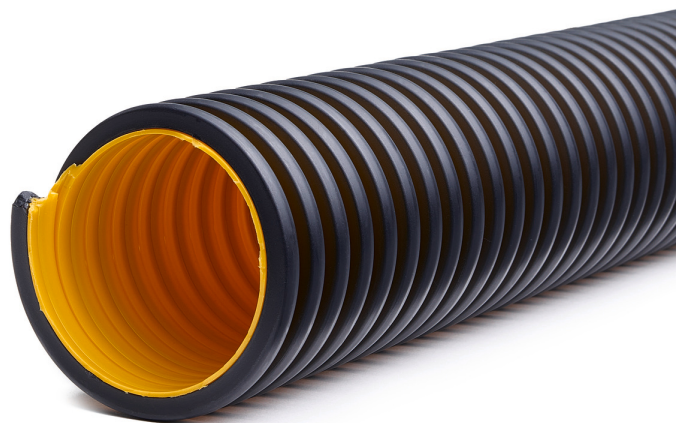

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
51	71,00	1,40	85	0,00	0,95	8,57	10	ND31005100K
51	71,00	1,40	85	0,00	0,95	12,85	15	ND31005100M
51	71,00	1,40	85	0,00	0,95	17,14	20	ND31005100N
63	83,00	1,40	105	0,00	0,95	12,24	10	ND31006300K
63	83,00	1,40	105	0,00	0,95	18,36	15	ND31006300M
63	83,00	1,40	105	0,00	0,95	24,48	20	ND31006300N
76	96,00	1,40	125	0,00	0,95	29,05	20	ND31007600N
76	96,00	1,40	125	0,00	0,95	14,53	10	ND31007600K
76	96,00	1,40	125	0,00	0,95	21,79	15	ND31007600M
102	122,00	1,40	165	0,00	0,85	19,10	10	ND31010200K