
Ocono

France

VIDAFLEX NT

Very flexible hose made of a special PVC / BUNA compound

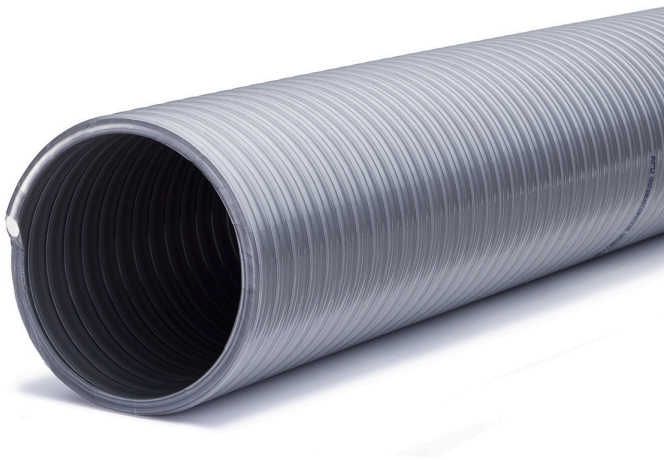

Applications liquid manure spreading, fertilizer spreading, silo vehicles, agriculture, waste water

Structure PVC/Buna, grey, opaque, plastic spiral / rigid PVC

Temperature -40°C up to 60°C

Properties very good flexibility, very high vacuum resistance, smooth inside, corrugated outside, very good chemical resistance, good ozone- & UV-resistance, weather proof





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,40	4,20	110	7,00	0,88	0,50000	25,00	50	NA54102500R
30	38,60	4,30	120	6,00	0,88	0,57000	30,30	50	NA54103000R
32	41,20	4,60	120	6,00	0,88	0,60000	30,00	50	NA54103200R
38	48,00	5,00	140	6,00	0,88	0,70000	35,00	50	NA54103800R
40	50,00	4,50	150	5,00	0,88	0,83500	39,75	50	NA54104000R
51	61,40	5,20	170	5,00	0,88	1,00000	50,00	50	NA54105000R
60	71,00	5,30	190	4,00	0,88	1,30000	69,15	50	NA54106000R
63	74,00	5,60	210	4,00	0,88	1,40000	72,80	50	NA54106300R
76	88,40	6,20	240	4,00	0,88	1,70000	85,00	50	NA54107500R
80	92,40	6,20	250	3,00	0,88	2,10000	105,00	50	NA54108000R
90	102,00	6,20	290	3,00	0,88	2,21000	110,50	50	NA54109000R
102	116,40	7,20	320	3,00	0,88	2,70000	135,00	50	NA54110000R
110	124,00	7,20	410	3,00	0,88	3,19000	79,75	25	NA54111000P
127	141,00	7,80	620	2,00	0,88	3,60000	90,00	25	NA54112500P
152	170,00	9,00	680	2,00	0,88	20,00000	20,00	4	NA54115200C
152	170,00	9,00	680	2,00	0,88	25,00000	25,00	5	NA54115200E
152	170,00	9,00	680	2,00	0,88	30,00000	30,00	6	NA54115200G
152	170,00	9,00	680	2,00	0,88	5,00000	100,00	20	NA54115200N
203	224,00	10,50	1.100	1,00	0,88	8,51000	34,05	4	NA54120000C
203	224,00	10,50	1.100	1,00	0,88	8,51000	34,05	5	NA54120000E
203	224,00	10,50	1.100	1,00	0,88	8,51000	170,24	20	NA54120000N

Ocono France SARL | 30 Chemin de Fortuneau | 26200 Montélimar | France | T +33 475 017575 | france@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.

Date: 25.11.2026