


SMARTFLEX SMT PREMIUM

5-layer garden hose with innovative SMT fabric

Applications	irrigation
Structure	PVC / soft PVC, grey, opaque, SMT knitting
Temperature	-20°C up to 65°C
Properties	excellent flexibility, good tensile strength, crush-resistant, can be driven over, very high pressure resistance, good ozone- & UV-resistance, hydrolysis & microbe resistant, weather proof, rot proof, phthalate-free

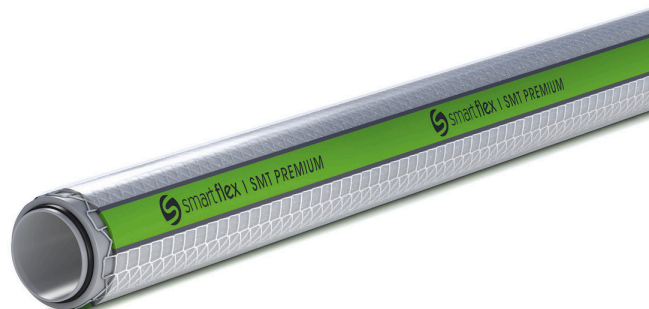

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
15	20,80	2,90	90	12,00	36,00	0,20000	20,00	100	NS75001600T
25	33,20	4,10	125	7,00	21,00	0,43000	21,50	50	NS75002500R
25	32,80	3,90	125	7,00	21,00	0,43000	43,00	100	NS75002500T