VIDAFLEX EXTRA


Very flexible spiral hose made of a special soft PVC

Applications waste management, waste water, waste disposal vehicles, liquid manure spreading, suction vehicles & dredgers

Structure soft PVC, blue / signal blue (similar RAL 5005), opaque, plastic spiral / rigid PVC

Temperature -40°C up to 50°C

Properties very good flexibility, very good low-temperature flexibility, crush-resistant, very high pressure resistance, very high vacuum resistance, corrugated outside, very smooth inside

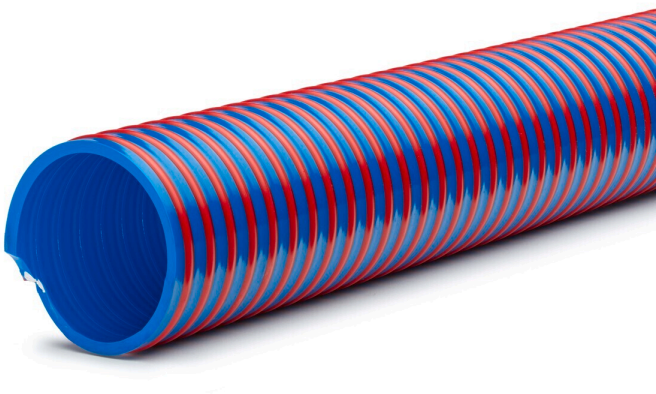





made in Germany

Inner Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Length (m)	Article Number
40	4,50	150	5,00	0,88	0,80000	50	NA54004000R
51	4,70	170	5,00	0,88	1,00000	30	NA54005100Q
51	4,70	170	5,00	0,88	1,00000	50	NA54005100R
60	5,30	190	4,00	0,88	1,38000	50	NA54006000R
70	6,20	240	4,00	0,88	1,50000	30	NA54007000Q
80	6,20	250	3,00	0,88	2,10000	30	NA54008000Q
102	7,20	320	3,00	0,88	2,70000	30	NA54010200Q

Ocono France SARL | 30 Chemin de Fortuneau | 26200 Montélimar | France | T +33 475 017575 | france@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 19.11.2026