OnePress Germany 258

Flexible and robust compressed air hose with highly tear-resistant fabric insert

Applications irrigation, agriculture, compressed air

Structure SBR, yellow, opaque

Temperature -20°C up to 100°C

Properties very high pressure resistance, crush-resistant, very good abrasion resistance, very smooth inside, smooth outside, good oil & petrol resistance

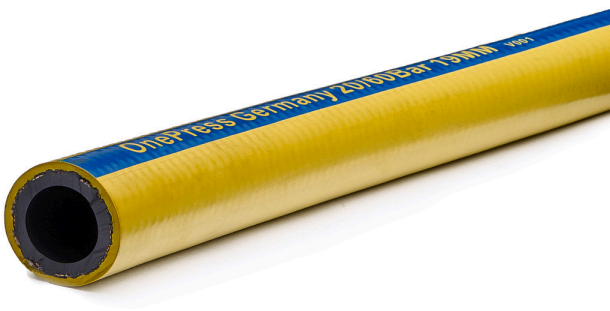





Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	31,00	6,00	240	20,00	60,00	0,65000	13,00	20	NS61301900N
19	31,00	6,00	240	20,00	60,00	0,65000	26,00	40	NS61301900Y
25	39,00	7,00	300	20,00	60,00	1,10000	22,00	20	NS61302500N
25	39,00	7,00	300	20,00	60,00	1,10000	44,00	40	NS61302500Y

Ocono France SARL | 30 Chemin de Fortuneau | 26200 Montélimar | France | T +33 475 017575 | france@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.

Date: 25.11.2026