
VIDAFLEX

Very flexible hose made of soft PVC, reinforced with an shock resistant rigid PVC spiral



Applications	liquid manure spreading, waste water, sewage treatment plants, agriculture, water drain
Structure	soft PVC, blue, opaque, plastic spiral / rigid PVC
Temperature	-25°C up to 60°C
Properties	very good flexibility, crush-resistant, very high vacuum resistance, high pressure resistance, with external abrasion protection spiral, very smooth inside, corrugated outside



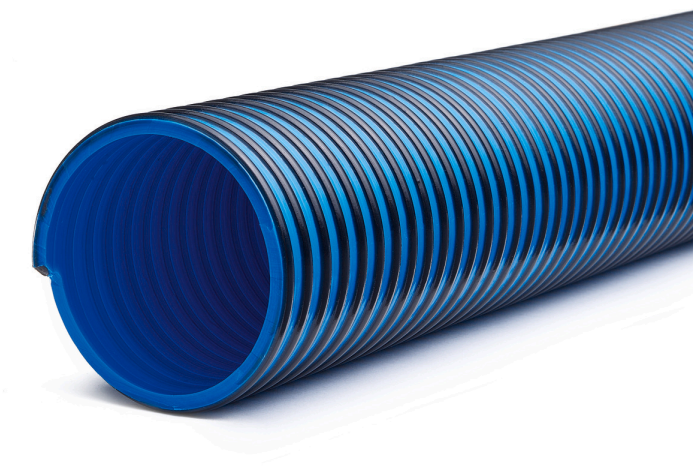

made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
51	61,40	5,20	160	5,00	0,88	1,04000	52,00	50	NA53905100R
76	87,60	5,80	250	4,00	0,88	1,70000	85,00	50	NA53907600R
80	91,60	5,80	260	4,00	0,88	1,80000	90,00	50	NA53908000R
102	116,40	7,20	320	3,00	0,88	2,75000	137,50	50	NA53910200R
110	125,00	7,50	350	3,00	0,88	3,00000	75,00	25	NA53911000P
110	125,00	7,50	350	3,00	0,88	3,00000	150,00	50	NA53911000R
125	140,60	7,80	400	3,00	0,88	3,60000	108,00	30	NA53912500Q
152	170,00	9,50	500	3,00	0,88	14,85000	14,85	3	NA53915200B
152	170,00	9,50	500	3,00	0,88	5,26000	123,75	25	NA53915200P
152	170,00	9,50	500	3,00	0,88	9,90000	9,90	2	NA53915200X2
203	224,00	10,50	1.015	2,00	0,88	9,35000	182,50	25	NA53920300P

Ocono France SARL | 30 Chemin de Fortuneau | 26200 Montélimar | France | T +33 475 017575 | france@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 25.11.2026