


GreenX OneFlat M

Light weight flat hose with a PVC double layer and woven polyester yarn inlay

Applications	waste water, agricultural technology, construction machines, construction drying, irrigation
Structure	PVC, blue, opaque
Temperature	-20°C up to 65°C
Properties	heavy-duty, crush-resistant, can be driven over, high pressure resistance, smooth inside, smooth outside

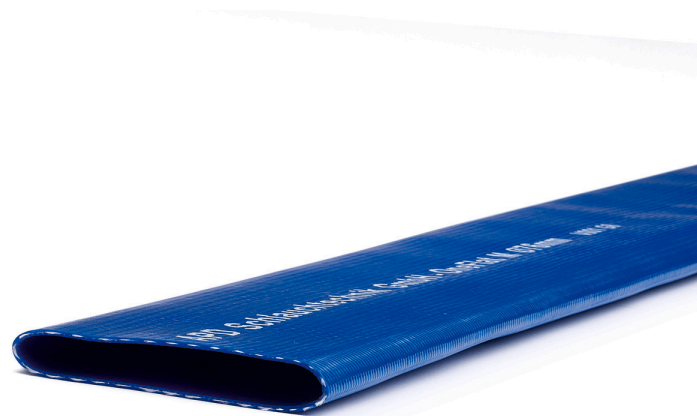

Inner Diameter (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	8,00	24,00	0,17000	8,50	50	NG20001900R
25	8,00	24,00	0,22000	11,00	50	NG20002500R
32	8,00	24,00	0,24000	12,00	50	NG20003200R
38	8,00	24,00	0,29000	14,50	50	NG20003800R
51	8,00	24,00	0,32000	16,00	50	NG20005000R
51	8,00	24,00	0,32000	32,00	100	NG20005000T
63	8,00	24,00	0,36000	18,00	50	NG20006300R
76	8,00	24,00	0,36000	18,00	50	NG20007500R
102	6,00	18,00	0,66000	33,00	50	NG20010000R
110	6,00	18,00	1,15000	57,50	50	NG20011000R