


S 3 PVC S NOIR

Very flexible and light weight PVC hose with shock-resistant hard PVC spiral

Applications	pond technology, water drain, irrigation, waste water, filter systems
Structure	PVC / soft PVC, black, opaque, plastic spiral / rigid PVC
Temperature	-5°C up to 60°C
Properties	very good flexibility, corrugated outside, smooth inside, , good ozone- & UV-resistance

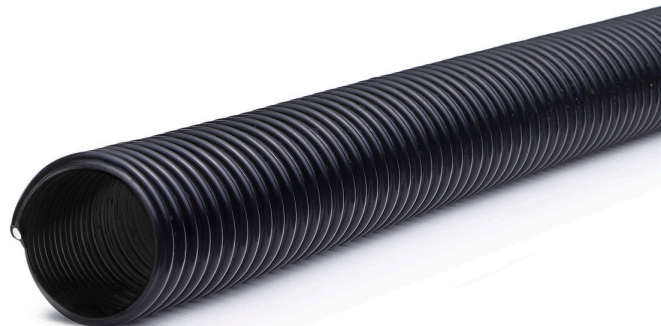

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	23,80	2,40	19	0,39	0,11000	3,60	30	ND39301950Q
25	30,00	2,50	25	0,39	0,13000	5,40	30	ND39302550Q
32	38,00	3,00	32	0,34	0,20500	6,60	30	ND39303250Q
38	44,40	3,20	38	0,29	0,26000	8,10	30	ND39303850Q
40	46,40	3,20	40	0,29	0,27000	8,40	30	ND39304050Q
50	57,00	3,50	50	0,29	0,43500	12,60	30	ND39305050Q